

[Get a Quote](#)

Overview

The Cisco Catalyst 2960-S Series Switches WS-C2960S-24PD-L integrates Power over Ethernet (PoE) and dual-purpose uplinks as its superiority as an easy-to-employed Layer 2 Switch for enterprise, midmarket, and branch office networks. It provides 370W PoE capacity while 30W each to 12 ports or 15.4W each to 24 ports, and it also has 2 Ten Gigabit Ethernet or 2 One Gigabit Ethernet SFP+ uplink ports for dual-purpose. Optional Cisco FlexStack stacking and Lan Base image are both supported.

Quick Specs

Figure 1 shows the appearance of the WS-C2960S-24PD-L.

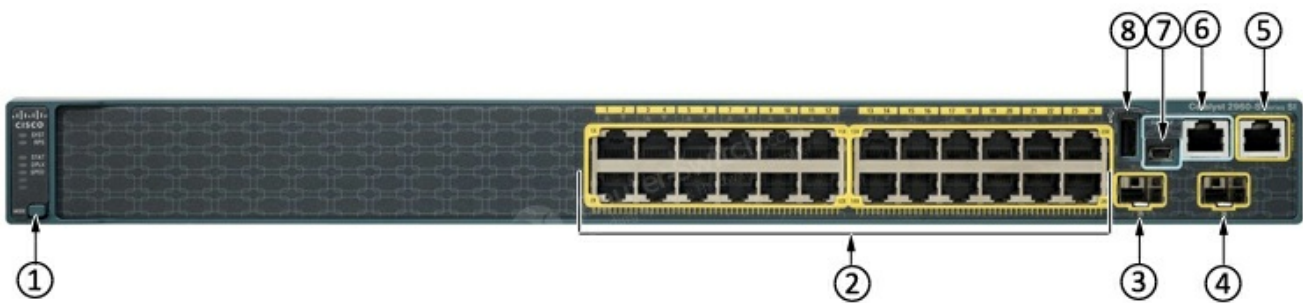


Table 1 shows the Quick Spec of the WS-C2960S-24PD-L.

Product Code	WS-C2960S-24PS-L
Enclosure Type	Rack-mountable - 1U
Feature Set	LAN Base
Uplink Interfaces	2 x 10 Gigabit SFP+ or 2 x 1 Gigabit SFP+
Downlink Ports	24 x Ethernet 10/100/1000 PoE+ ports
PoE capacity	370W
Expansion Slot(s)	1 (total) / 1 (free) x Stacking Module
Switching capacity	176 Gbps
Forwarding performance (64-byte packet size)	65.5 Mpps
DRAM	128 MB
Flash Memory	64 MB Flash
Dimensions	44.5 x 38.6 x 4.5 cm
Package Weight	10.65 Kg

Product Details


Figure 2 shows the front panel of the WS-C2960S-24PD-L.



Note:

(1)	Mode Button	(5)	Ethernet Management Port
(2)	24 x Ethernet 10/100/1000 PoE+ ports	(6)	RJ45 Console Port
(3)	SFP Module Slot 1	(7)	USB mini-Type B (console) Port
(4)	SFP Module Slot 2	(8)	USB Type A Port

Figure 3 shows the back panel of the WS-C2960S-24PD-L.

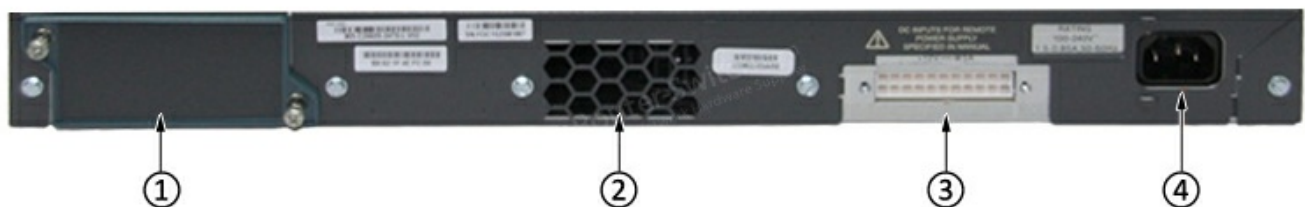

Note:

(1)	1 (total) / 1 (free) x Stacking Module	(3)	RPS Connector
(2)	Fan Exhaust	(4)	AC power connector

The Accessories

Table 2 shows some accessories of the WS-C2960S-24PD-L.

Models	Description
C2960S-STACK	Catalyst 2960S FlexStack Stack Module optional for LAN Base
GLC-LH-SM	GE SFP, LC connector LX/LH transceiver
GLC-SX-MMD	1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
CAB-CONSOLE-RJ45	Console Cable 6ft with RJ45 and DB9F

Compare to Similar Items

Table 3 shows the comparison of similar items.

Models	WS-C2960S-24PD-L	WS-C2960S-24PS-L
PoE Available	Yes	Yes
Ports	24 × Ethernet 10/100/1000 PoE+ ports FP)	24 × Ethernet 10/100/1000 PoE+ ports FP)
Switching Capacity	176 Gbps	176 Gbps
Uplinks	2 x 10G SFP+ or 2 x 1G SFP+	4 x 1G SFP
Feature Set	LAN Base	LAN Base
Stackable	Yes	Yes

Get more information

Do you have any question about the WS-C2960S-24PD-L?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

WS-C2960S-24PD-L Specifications	
General Information	
Device Type	Switch - 24 ports - Managed
Enclosure Type	Rack-mountable - 1U
Ports	24 x 10/100/1000 + 2 x 10 Gigabit SFP+
Power Over Ethernet (PoE)	Yes
Performance	Switching capacity : 176 Gbps Forwarding performance (64-byte packet size) : 65.5 Mpps
MAC Address Table Size	8K entries
Remote Management Protocol	SNMP 1, SNMP 2, RMON 1, RMON 2, RMON 3, RMON 9, Telnet, SNMP 3, SNMP 2c, HTTP, HTTPS, TFTP, SSH
Encryption Algorithm	SSL
Authentication Method	Secure Shell (SSH), RADIUS, TACACS+
Features	Layer 2 switching, auto-sensing per device, dynamic IP address assignment , power over Ethernet (PoE), auto-negotiation, BOOTP support, ARP support, load balancing, VLAN support, auto-uplink (auto MDI/MDI-X), IGMP snooping, Syslog support, DiffServ support, Broadcast Storm Control, IPv6 support, Multicast Storm Control, Unicast Storm Control, Rapid Spanning Tree Protocol (RSTP) support, Multiple Spanning Tree Protocol (MSTP) support, DHCP snooping, Dynamic Trunking Protocol (DTP) support, Port Aggregation Protocol (PAgP) support, Access Control List (ACL) support, Quality of Service (QoS), PoE+, Link Aggregation Control Protocol (LACP), Port Security, MAC Address Notification, Remote Switch Port Analyzer (RSPAN)
Compliant Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.1D, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3af, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1w, IEEE 802.1x, IEEE 802.1s, IEEE 802.3ah, IEEE 802.1ab (LLDP), IEEE 802.3at
RAM	128 MB
Flash Memory	64 MB Flash
Status Indicators	Port status, link activity, port transmission speed, port duplex mode, power, system

WS-C2960S-24PD-L Specifications

Expansion / Connectivity

Interfaces	24 x 10Base-T/100Base-TX/1000Base-T - RJ-45 - PoE USB : 1 x 4 PIN USB Type A 1 x console - mini-USB Type B - management 1 x console - RJ-45 - management 1 x 10Base-T/100Base-TX - RJ-45 - management 2 x SFP+
Expansion Slot(s)	1 (total) / 1 (free) x Stacking Module

Power

Power Device	Power supply - internal
Voltage Required	AC 120/230 V (50/60 Hz)
Power Consumption Operational	55 Watt

Miscellaneous

Width	17.5 in. (44.5 cm)
Depth	15.2 in. (38.6 cm)
Height	1.8 in. (4.5 cm)
Weight	13 lbs (5.77 kg)
Rack Mounting Kit	Optional
MTBF	237,016 hour(s)
Compliant Standards	TUV GS, CISPR 22 Class A, GOST, BSMI CNS 13438 Class A, CISPR 24, NOM, VCCI Class A ITE, EN55024, CB, EMC, MIC, IEC 60950-1, EN 60950-1, UL 60950-1 Second Edition, RoHS, CSA C22.2 No. 60950-1, FCC Part 15 B Class A

Software / System Requirements

Software Included	Cisco IOS LAN Base
Service & Support	Limited lifetime warranty
Service & Support Details	Limited warranty - replacement - lifetime - response time: next business day Limited warranty - power supply and fans - 5 years New releases update

Environmental Parameters

Min Operating Temperature	23 °F (-5 °C)
Max Operating Temperature	104 °F (40 °C)
Humidity Range Operating	10 - 95% (non-condensing)
Min Storage Temperature	-13 °F (-25 °C)
Max Storage Temperature	158 °F (70 °C)
Humidity Range Storage	10 - 95% (non-condensing)

Want to Buy

[Order Now](#)
[Get a Quote](#)

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com