

[Get a Quote](#)

## Overview

C9500-12Q-E is one of the the Cisco Catalyst 9500 Series Switches. The Cisco Catalyst 9500 Series Switches are the next generation of enterprise-class core and aggregation layer switches, supporting full programmability and serviceability. Based on an x86 CPU, the Catalyst 9500 Series is Cisco's lead purpose-built fixed core and aggregation enterprise switching platform, built for security, IoT, and cloud. The Catalyst 9500 Series is the industry's first purpose-built 40 Gigabit Ethernet line of switches targeted for the enterprise campus.

## Quick Specs

Figure 1 shows the appearance of C9500-12Q-E.

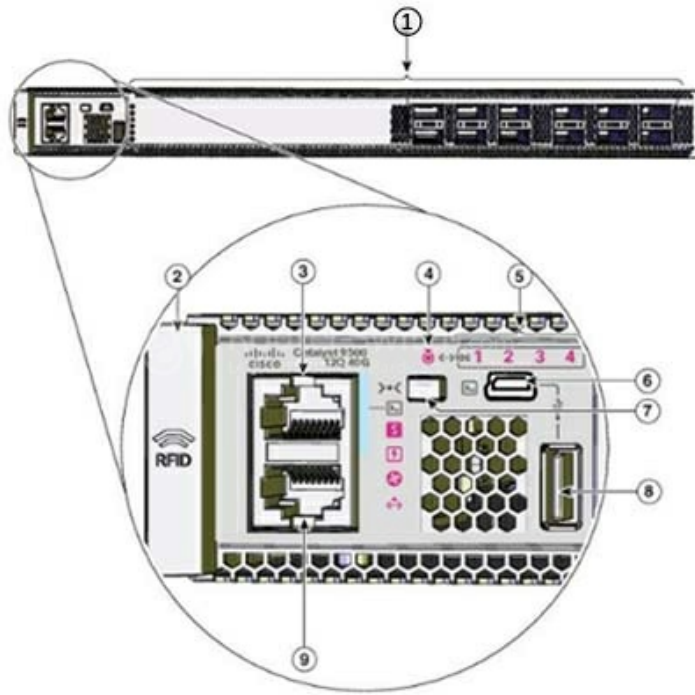


Table 1 shows the Quick Specs.

Product Code	C9500-12Q-E
Description	Catalyst 9500 12-port 40G switch, Network Essentials
Switching capacity	Up to 960 Gbps
Forwarding rate	Up to 720 Mpps
AC power max rating	950W
System power consumption	850W max
Dimensions (H x W x D)	1.73 x 17.5 x 21.52 in
Rack units (RU)	1 RU

## Product Details

Figure 2 shows the front panel of C9500-12Q-E.



Note:

(1)	12 40G QSFP ports	(6)	USB mini Type B console port
(2)	RFID	(7)	Mode button
(3)	Console port (RJ-45 Serial)	(8)	USB 2.0 host port
(4)	Blue beacon LED	(9)	Ethernet management RJ-45 port
(5)	10G Status LEDs		

### Get More Information

Do you have any question about the Cisco C9500-12Q-E?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

C9500-12Q-E Specifications	
Switching capacity	Up to 960 Gbps
Forwarding rate	Up to 720 Mpps
Total number of MAC addresses	Up to 64,000*
Total number of IPv4 routes (Address Resolution Protocol [ARP] plus learned routes)	Up to 64,000 indirect* Up to 32,000 host*
Total number of IPv6 routes	Up to 32,000 indirect* Up to 16,000 host*
Multicast scale	Up to 48,000*
QoS ACL scale	Up to 18000*
Security ACL scale	Up to 18000*
FNF entries	Up to 512,000*

DRAM	16 GB
Flash	16 GB
VLAN IDs	4000
Total Switched Virtual Interfaces (SVIs)	4000
Jumbo frame	9198 bytes
Dimensions (H x W x D)	1.73 x 17.5 x 21.52 in
Rack units (RU)	1 RU
Input voltage	90 to 264 VAC
Operating temperature	32°F to 104°F (0° to 40°C)
Storage temperature	-4° to 149°F (-20° to 65°C)
Relative humidity operating and nonoperating noncondensing	Ambient (noncondensing) operating: 5% to 90% Ambient (noncondensing) nonoperating and storage: 5% to 95%
Altitude	Operation up to 6000 ft
MTBF (hours)	179,660
<b>Power supply specifications</b>	
Power Supply Feature	Support in the Catalyst 9500 Series
AC power max rating	950W
System power consumption	850W max
Input-voltage range and frequency	AC 115 to 230 VAC, 50 to 60 Hz
Power supply efficiency	94%
Total output BTU (Note: 1000 BTU/hr = 293W)	2901 BTU/hr (850W) max
Input current	AC 10A at 115VAC, 5 A at 230VAC
Output ratings	12V at 79A, 12V at 3A
Output holdup time	AC = 10 ms at maximum load
Power-supply input receptacles	AC IEC 60320 C16
Power cord rating	AC 15A

## Want to Buy

Order Now

Get a Quote

## Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold

18,000+

Customers Trusted

\$20,000,000

Inventory Available

50%-98%

Off Global List Price

100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)